


Epiphan's family of Broadcasters captures and streams audio/video from VGA, HDMI™, DVI, or SDI sources such as HD cameras and computer displays. Streaming can be done over corporate networks, CDNs, or the internet. We offer everything from simple, portable appliances to powerful rack-mount solutions with production video switching.

Epiphan Broadcasters are trusted for mission-critical deployments serving a wide range of applications including:

- > **Live Events** (concerts, conferences, seminars)
- > **Corporate** (all-hands meetings, company presentations)
- > **Healthcare** (live procedures, remote diagnoses and pathology)
- > **Legal** (depositions, courtroom proceedings)
- > **Control Center** (power stations, emergency response, air traffic control)

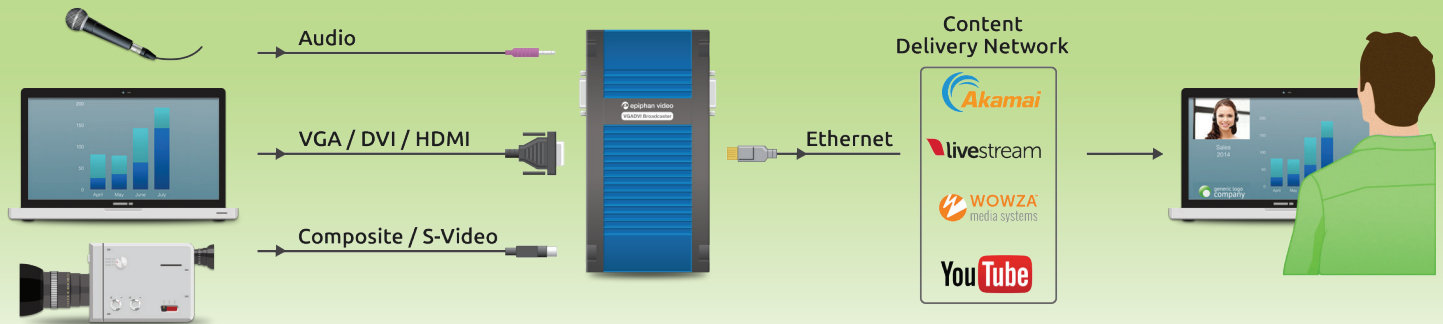

EPIPHAN PEARL™

Self-contained, portable production video switcher. Featuring dual HDMI, SDI and VGA inputs; an LCD display for confidence monitoring, quick configuration, live switching and recording control; and ample space for storing high quality recordings. Capture, stream and record four HD channels at 30 fps.

VGA GRID™

Powerful rack-mount live production switcher that handles up to twelve local HD sources or up to 64 remote HD sources via Ethernet/IP. Performs multi-encoding to provide multiple formats and bit rates. Fully customizable layouts and branding. Up to 24 TB of removable RAID or configurable with SSD storage.



Pearl™



VGADVI Broadcaster™



DVI Broadcaster DL™



VGA Grid™

VGA / DVI / HDMI Display and Camera Streaming:

SDI Camera Streaming:

Audio Streaming:

Analog Video Streaming (S-Video, Composite):

Dedicated Apple Live Stream (iPhone/iPad):

Multiple Video Sources:

Max Resolution Supported:

CDN Support (RTMP, RTSP):

Capture Rate @ HD 1080p:

Max Capture Rate:

Storage:

●

●

●

●

●

-

-

●*

●

●

●

●

-

●

-

●

●

-

-

●

1 - 4 sources

1 - 2 sources

1 source

up to 64 sources

2048x2048

1920x1200

2048x2048

2048x2048

●

●

●

●

4 @ 30 fps
or 2 @ 60 fps

30 fps

30 fps

30 fps

60 fps

30 fps

60 fps

85 fps

1 TB

8 GB

8 GB

6 - 24 TB

*SDI Capture is supported on Standalone VGA Grid only

Your address and contact information here.

™ and © 2016 Epiphan Systems Inc.

Epiphan, Epiphan Video, Epiphan Systems, its products names and logos are tradenames or trademarks of Epiphan Systems Inc. All other company, interface and product names and logos are trademarks or registered trademarks of their respective owners in certain countries. Product descriptions and specifications regarding the products in this document are subject to change without notice.